



Quality. Service. Value.

TPS Home

Contact Us

Products

Distributors

Brochures

Prices

poolCHEM



请使用翻译作用于这页底部以翻译页对汉语。

TPS Australia - Quality hand-made instruments since 1968.

Nothing's as cool, as a freshwater pool™

poolCHEM ORP and pH Controller for Pools and Spas

The Plus Pack, which was previously optional, is standard from 2005.



Automatic controller for ORP and pH in Swimming and Spa Pools. Designed to control external pumps, valves etc. Temperature readout is provided. Supplied with sensors, calibration standards and all accessories required for installation.

The new advanced design makes this unit far superior and yet easier to use than other brands. The poolCHEM is the culmination of over 30 years manufacturing experience.

[Full size image](#)

- ◆ Waterproof construction rated to IP65.
- ◆ Supplied with 24V DC output control cable for low-powered devices or relay etc.
- ◆ Memory for 2300 stored readings, with automatic datalogging facility.
- ◆ RS232 Interface for remote monitoring of system (cable is optional).
- ◆ Pump sensor only allows automatic dosing when circulating pump is
- ◆ Quick-dose function
- ◆ Temperature readout.
- ◆ Fully adjustable ON and OFF times can be set separately for ORP and pH pumps, eliminating over-dosing.
- ◆ User can select acid or alkali addition.
- ◆ Password protection, so only qualified users can change set-up or calibration.
- ◆ Good laboratory practices (GLP) function brings analytical Q.A. to

- ◆ on.
- ◆ Graphic display mode makes the data easy at a glance.
- ◆ Automatic calibration
- ◆ Configure with pool size for quick set-up
- ◆ Operates off a single AC/DC power supply. No electrical installation required.
- ◆ Supplied complete with Sensor / Injection pipe fitting.

- ◆ swimming pools. Instant recall of current calibration and system set-up information.
- ◆ 24 Hour calendar clock.
- ◆ Emergency shutoff timer shuts off ORP and pH pumps if they operate continuously for user-set time.

Specifications

ORP

Range : 0 to 1000 mV
 Resolution : 1 mV
 Accuracy : +/-1 mV

pH

Ranges : 2.0 to 12.0 pH
 2.00 to 12.00 pH
 (user selectable)
 Resolutions: 0.1 pH
 0.01 pH
 Accuracy : +/-0.01pH

Temperature

Range : -10.0 to 120.0 °C
 Resolution : 0.1 °C
 Accuracy : +/-0.2 °C

Temperature Compensation

Automatic Temperature Compensation for pH. Uses temperature sensor built into ORP sensor

Calibration

Automatic calibration for all parameters, with automatic standards recognition.

Enclosure

Tough ABS enclosure, fully waterproof to IP65.

Display

80 Character alphanumeric LCD with user-friendly menu system and full-text messages.

Dimensions

210 x 180 x 90 mm

Good Laboratory Practices

All calibration information and user-adjustable set-up information is stored in memory, and can be recalled on the display at any time. This information can also be printed or downloaded to a computer, when the optional RS232 cable is fitted.

The unit's serial number is stored in memory. This is displayed at turn-on, and included with GLP information.

Plus-Pack

(previously optional, but standard from 2005)

The Plus Pack includes the following items...

- ◆ RS232 Serial Interface
- ◆ Datalogging capability
- ◆ 24 Hour Calendar Clock
- ◆ Selectable High or Low

Datalogging

Memory

2300 readings, including date and time.

Notepad

Records reading into memory at the touch of a button.

Automatic Datalogging

User selectable for one reading every...

1,2,5,10,15,20 or 30 minutes
 or every...

1,2,3,4,6,8,12 or 24 hours

RS232 Serial Interface

300, 9600 and 19200 Baud.

8 Bits, No Parity, 1 Stop Bit,
 XON/XOFF Protocol .

Mass

Full Kit : Approx 3.0kg

Note : RS232 cable is optional.**Environment**

Temperature : 0 to 45 °C

Humidity : 0 to 95% R.H.

Calendar Clock

24 Hour Calendar Clock

Power

24V DC, 50mA Max for controller.

Up to 150 mA can be supplied out of each 24V DC control output.

AC/DC Adaptor to suit specified country is supplied.

Ordering Information

	Part No
poolCHEM Controller.....	111113
Kit Includes	
pH Sensor, 2m.....	111230
ORP/Temp Sensor. 2m.....	111263
pH6.88 Buffer, 200mL.....	121306
Inductive Pump Sensor.....	130102
pH4.00 Buffer, 200mL.....	121381
231mV ORP Standard.....	121309
Sensor/Injection Tee.....	117904
50 to 40mm Bushes x 2.....	NPBR5040
24VDC Dual Output Cable.....	130054
AC/DC Power Adaptor.....	Specify Country
poolCHEM Handbook.....	130050

Spares

	Part No
Pump Tube assembly, 1.8L/Hr.	116353
Pump Tube assembly, 6.1L/Hr.	116352
Pump Tube Lubricant, 3mL....	130103

Instrument Options


RS232 Interface Cable.....	130041
Communication Software for Windows.....	130086
Alarm Siren (105dB).....	130101

No other items are required to install and operate the poolCHEM.[Download this Specification Sheet in PDF format.](#)[Download the full colour TPS Pool Products Brochure \(2.05 MB PDF\).](#)[Download the handbook for this instrument.](#)**Hint :** Right click on a link, then select "Save Target As..." or "Save Link As..." to save the file to your own computer.

If you do not have Adobe Acrobat in your computer, a free Acrobat Reader can be downloaded by clicking on the following link.



TPS reserves the right to change any part of this specification without notice.
Version 2.0
Copyright © 2002, 2005 T.P.S. Pty Ltd

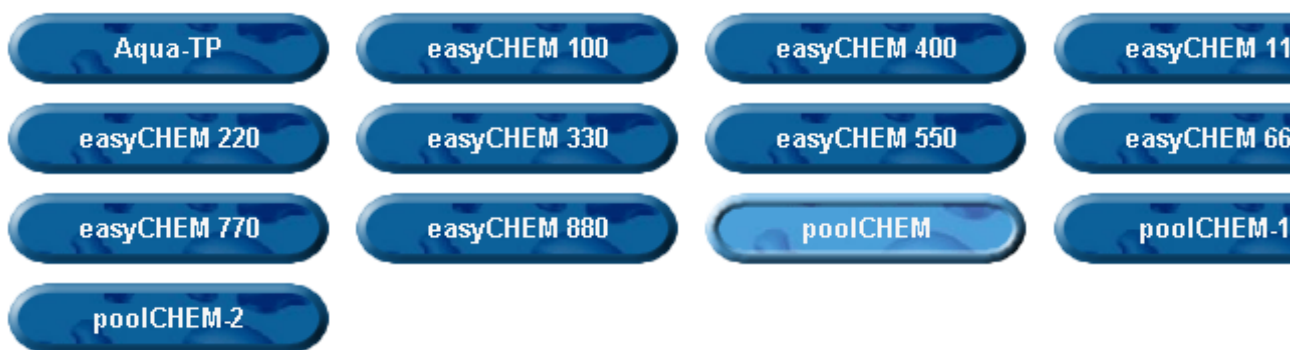

Send mail to tps@tps.com.au with questions or comments about this web site.

Web Author : Michael Schimkat

Copyright © 2002-2004, T.P.S. Pty Ltd

A.B.N. 30 009 773 371

Last modified: January 11, 2005

